



SET UP INSTRUCTIONS



Expand table frame by pulling legs outwards. Make sure corners lock into place before proceeding

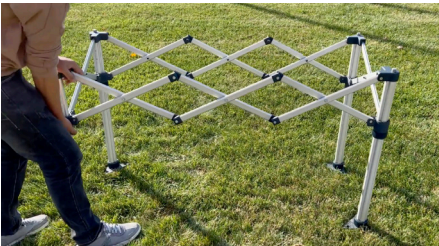


Assemble table rails by inserting connector into the receiving tube. Make sure to press spring button in while inserting.

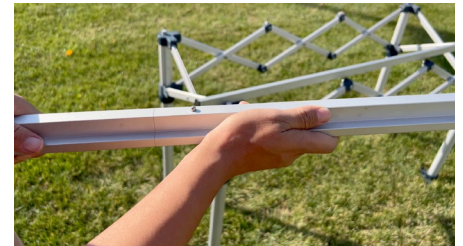

Once fully connected the spring button will pop into hole on receiving tube. Repeat for 2nd table rail.



Align holes on ends of table rails with posts on table frame corners.

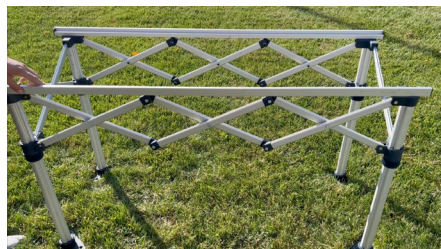

Repeat for both sides of the table frame



Unfold table top sections and place them on the table tails



Table assembly is now complete at lowest height (33in)



Twist black ring to lock or unlock adjustable legs to dial in table height



Table adjusted to max height (38in)